

JUSTRITE®

RIGID-LOCK QUICKBERMS®

CONVENIENT AND EFFICIENT

- Single piece construction with quick, easy setup—no assembly needed
- Sidewalls lower easily for convenient drive-in and –out
- Unobstructed workspace inside berm reduces tripping hazards
- Flexible design folds for easy shipping, portability, and storage—great for emergency use

RELIABLE PROTECTION

- 100% leakproof protection—helps comply with EPA for containment and spill prevention (SPCC)
- Reinforced Critical-Corner™ design with wraparound diagonal radio frequency (RF) welds prevents seam leaks
- Preventative spill containment protects the environment, while avoiding costly fines and hazardous clean-up costs
- Spill control measures protect workers by reducing slip and fall accidents

SUPERIOR DESIGN & PERFORMANCE

- Patented, built-in stainless steel wall supports lock sidewalls in a 12-in (305-mm) high, 90° vertical position—no sagging
- High-strength engineered nylon black support hub with integrated hole accepts anchors (anchors not included). When anchored and in the up position, wall brace support withstands winds of up to 40 miles per hour
- In down position, supports withstand vehicle weights of 11,000 lbs (5,000 kgs) at each tire
- Walls finished with a 1-in (25-mm) fray-resistant top hem for added strength and integrity
- Modified PVC coated fabric—chemically resistant against petroleum, oils, greases, and most acids
- Durable EnGuard™ V material for pedestrian and infrequent vehicle traffic, or heavier EnGuard™ VI material for more frequent vehicle traffic
- Quality backed by a 5-year limited warranty


INNOVATIVE, COST-EFFECTIVE SPILL CONTROL FOR DRUMS, IBCS, VEHICLES, TANKERS, AND MORE!



Patented Rigid-Lock® Technology



No assembly needed—saves time, ready in minutes!




Unfold berm, with supports in flat position.



A simple tug locks supports in upright position.

RIGID-LOCK QUICKBERMS® APPLICABLE INDUSTRIES

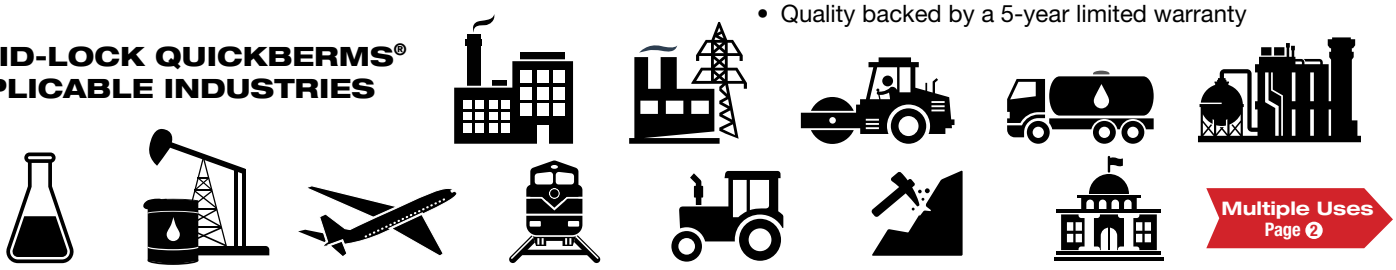

Multiple Uses Page 2




JUSTRITE®

RIGID-LOCK QUICKBERMS®








CAPTURE SPILLS TO PREVENT ACCIDENTS AND AVOID COSTLY FINES FOR A HEALTHIER BOTTOM LINE!

Capacity Gallons/Liters	Nominal Outside Dimensions W x D x H	Model No
Rigid-Lock QuickBerm® with EnGuard™ V—for pedestrian and infrequent vehicle traffic		
175/662	4 ft x 6 ft x 12 in (1.2 m x 1.8 m x 305 mm)	28512
235/890	4 ft x 8 ft x 12 in (1.2 m x 2.4 m x 305 mm)	28514
355/1344	6 ft x 8 ft x 12 in (1.8 m x 2.4 m x 305 mm)	28516
475/1798	8 ft x 8 ft x 12 in (2.4 m x 2.4 m x 305 mm)	28518
745/2820	10 ft x 10 ft x 12 in (3.0 m x 3.0 m x 305 mm)	28519
1075/4069	12 ft x 12 ft x 12 in (3.7 m x 3.7 m x 305 mm)	28522
1435/5432	12 ft x 16 ft x 12 in (3.7 m x 4.9 m x 305 mm)	28524
1795/6795	12 ft x 20 ft x 12 in (3.7 m x 6.1 m x 305 mm)	28526
1910/7230	16 ft x 16 ft x 12 in (4.9 m x 4.9 m x 305 mm)	28528
2390/9047	16 ft x 20 ft x 12 in (4.9 m x 6.1 m x 305 mm)	28530
2990/11318	20 ft x 20 ft x 12 in (6.1 m x 6.1 m x 305 mm)	28532
Rigid-Lock QuickBerm® Plus with EnGuard™ VI—for more frequent vehicle traffic		
595/2252	8 ft x 10 ft x 12 in (2.4 m x 3.0 m x 305 mm)	28500
1120/4240	10 ft x 15 ft x 12 in (3.0 m x 4.6 m x 305 mm)	28502
2510/9501	12 ft x 28 ft x 12 in (3.7 m x 8.5 m x 305 mm)	28504
4485/16978	12 ft x 50 ft x 12 in (3.7 m x 15.2 m x 305 mm)	28506
4840/18321	12 ft x 54 ft x 12 in (3.7 m x 16.5 m x 305 mm)	28508
5860/22183	14 ft x 56 ft x 12 in (4.3 m x 17.1 m x 305 mm)	28510

Note (1): For exterior dimension, add 8-in (203-mm) to width and length to account for support and hub.
Note (2): When selecting a berm size, allow 12-in (305-mm) at entry or exit for lowering and raising the wall.




CUSTOM DESIGNS AVAILABLE
SIZE • SHAPE • FUNCTION

5 Year Limited Warranty

© 2016 Justrite Mfg Code No. 141 (0616)

JUSTRITE®
1-800-798-9250
justritemfg.com