

The Rapid Threat of Fire:

Protect Your Business From Devastation & Loss



 **Justrite**®


EAGLE®
Justrite Safety Group

The National Fire Protection Association reports that in 2018 alone, there were 500,000 structural fires reported in the United States – equivalent to one fire every 63 seconds.

Justrite and Eagle's safety cans significantly reduce accidents and fire hazards, creating a safer work environment and ensuring the well-being of individuals.

Why are Safety Cans Necessary?

Safety cans prevent fires and explosions by controlling flammable vapors. The danger lies in vapors from liquids at or above their flash point, where they can form ignitable mixtures with air.

Safety cans are essential for storing and handling flammable or combustible liquids in workplace environments for several important reasons:



Fire prevention

Safety cans are designed to minimize the risk of fires when handling hazardous liquids. They contain vapors and prevent spills, reducing the chance of accidental ignition.



Regulatory compliance

Using approved safety cans helps businesses comply with OSHA regulations, state and local fire codes, and other safety standards.



Durability

Safety cans are constructed from materials like galvanized steel or high-density polyethylene, making them resistant to damage, corrosion, and heavy use.



Controlled pouring

Many safety cans, especially Type II cans, feature designs that allow for precise pouring, reducing the risk of spills and improving efficiency.



Proper identification

Safety cans often come in different colors to help easily identify the contents, further reducing the risk of mishandling.



Protection in case of fire

In the event of a fire, safety cans are designed to safely relieve internal pressure, preventing explosions that could occur with non-approved containers.

Why Choose a Justrite or Eagle Safety Can?

Justrite and Eagle safety cans are built to last and outperform competitors. Justrite Safety Group is a trusted brand, known for its commitment to quality, durability, and safety compliance.

SAFETY AND COMPLIANCE



Approvals and Compliance

Complies with OSHA, NFPA, IFC, and FM approved. Poly cans are FM approved.



Testing

Certified from Underwriters Laboratories (UL/ULC), and TÜV SÜD. Cans are pressure tested to UL regulatory standards.



Vapor Vent and Self-Closing lid

Leak-proof, self-closing lid with gasket allows vapor escape to prevent rupture in a fire and guards against spills.



Trilingual Label

Trilingual Warning label provides important instructions and precautions in English, Spanish and French.

DURABILITY



Made in the USA

24-gauge galvanized US steel with rugged, chemical-resistant powder-coat finish, stands up to rigorous use.



Flame Arrestors

Stainless steel flame arrester stops flashback ignition. Long 3-1/2-in (88-mm) length offer safe secure insertion of gas nozzle.



Leak-Proof


100% leak tested lid. Every safety can is tested under pressure to ensure it will not leak.



Rugged Design

Deep draw design with a double interlock "no weld" bottom seam for a better seal.

EASE OF USE



Comfort

Free-swinging rounded handles (Type I) or fixed handles (Type II) for comfortable carrying.




Safe Handle

Carry handle has a rounded design, doesn't cut into the hand and made to carry heavy loads.



Easy to Pour


Type I (one-opening) cans come with a convenient optional funnel to pour into smaller openings.

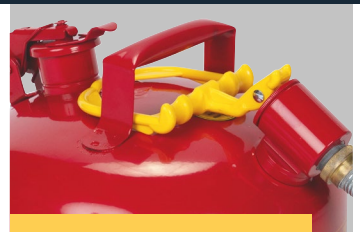

Easy to Fill

In Type II cans, an ergonomic lift lever opens the self-closing spout wide for easy filling.

VERSATILITY



DOT cans available

The only FM-approved Department of Transportation (DOT) cans. The DOT cans are Type II with roll bars.



Easy ID

Available in different colors for easy identification of contents, avoiding accidents



Various Capacities

Available in various capacities to accommodate equipment of different sizes such as equipment tanks.



Variety

Available in Metal Type I cans, Type II cans, and Polyethylene cans.

What to Look for When Choosing a Safety Can?

Considerations

Justrite and Eagle Benefits

What is the difference between a Type I and Type II safety can?

Justrite and Eagle both have Type I and Type II safety cans.

- Type I safety cans have one opening from which to fill and pour into a larger receiving vessel.
- Type II safety cans have two openings: a top opening with a lift lever for filling and a second one with a flexible metal hose attached for controlled, plug-free dispensing into smaller openings.

What safety features should I look for?

These are the safety features included in a Justrite or Eagle can:

- Automatic positive-pressure relief vent vapor between 3 and 5 psig (0.2 and 0.35 bar) internal pressure to prevent rupture (or explosion in event of fire).
- Stainless steel flame arrestors to prevent flashback ignition and explosions when handling flammable liquids.
- Yellow band around can body (Justrite cans only)—warns of danger and includes large area for content identification.

What safety regulations or compliance should I look for?

Our cans are designed to meet these safety and regulatory specifications:

- Occupational Safety Health Administration (OSHA)
- National Fire Protection Association (NFPA) and International Fire Code (IFC)
- Additionally, our cans have earned certification from nationally recognized testing laboratories such as FM Approvals, Underwriters Laboratories (UL/ULC), and TÜV SÜD.

I need a safety can that is durable and will last?

Our cans are made to last, these are a few our features that ensure longevity:

- Made in the USA, 24-gauge galvanized steel with tough, chemical-resistant powder-coat finish—stands up to rigorous use.
- Reinforced ring(s) (Justrite cans only)—strengthens can walls and reduces denting.
- Deep draw design with a double interlock “no weld” bottom seam for a better seal.
- 10 year warranty

I am storing different kinds of liquid flammables. Is there a way to know what is in the cans?

We offer a variety of safety cans for convenient and efficient use in different situations.

- Available in red-gasoline or liquid with a flash point below 80 degrees fahrenheit, yellow-diesel, blue-kerosene, and green-oil and different capacities.
- The different colors make for easy identification of contents, avoiding accidents.
- Justrite safety cans feature a large ID zone designed for easy labeling to clearly identify the contents of the can.



Justrite and Eagle Safety Cans

Offer Exceptional Value, Total Cost of Ownership, and Savings



Cost-Effectiveness

- Provide **up to 48% reduction in total cost of ownership** throughout their operational lifespan.
- 24-gauge galvanized steel with tough, chemical-resistant powder-coat finish—stands up to rigorous use and longevity
- Stainless steel flame arrestors for longevity
- Economical solution cost-average \$100

Long-Term Value

- Offer significant long-term value, providing **up to 52% greater total cost saving** compared to competing products over their lifetime.
- Made in the USA



Justrite and Eagle Lead the Industry with a Comprehensive Range of Compliant Flammable Safety Cans: Safer, User-Friendly, and Longer Lasting



TYPE I SAFETY CANS



| Capacity | Description | Outside Dimensions | Approvals / Regulation | Red Models | Yellow Models | Blue Models | Green Models |
|--------------------|-------------------------|----------------------------------|------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| 5 gallon (19 L) | Steel type I Safety Can | 11.75 x 16.875 in (298 x 429 mm) | FM, OSHA, UL, ULC, TUV | 7150100, w/ funnel 7150110 | 7150200, w/ funnel 7150210 | 7150300, w/ funnel 7150310 | 7150400, w/ funnel 7150410 |
| 2 gallon (7.5 L) | | 9.5 x 13.75 in (241 x 349 mm) | | 7120100, w/ funnel 7120110 | 7120200, w/ funnel 7120210 | 7120300, w/ funnel 7120310 | 7120400, w/ funnel 7120410 |
| 1 gallon (4 L) | | 9.5 x 11 in (241 x 279 mm) | | 7110100, w/ funnel 7110110 | 7110200, w/ funnel 7110210 | 7110300, w/ funnel 7110310 | 7110400, w/ funnel 7110410 |
| 2.5 gallon (9.5 L) | | 11.75 x 11.5 in (298 x 292 mm) | | 7125100, w/ funnel 7125110 | 7125200, w/ funnel 7125210 | 7125300, w/ funnel 7125310 | 7125400, w/ funnel 7125410 |



TYPE I SAFETY CANS



| Capacity | Description | Outside Dimensions | Approvals / Regulation | Red Models | Yellow Models | Blue Models | Green Models |
|--------------------|-------------------------|------------------------------------|------------------------|-------------------------|---------------------------|---------------------------|---------------------------|
| 5 gallon (19 L) | Steel type I Safety Can | 12.5 x 13.5 in (317.5 x 342.9 mm) | FM, OSHA, UL, ULC | UI50S, w/ funnel UI50FS | UI50SY, w/ funnel UI50FSY | UI50SB, w/ funnel UI50FSB | UI50SG, w/ funnel UI50FSG |
| 2 gallon (7.5 L) | | 11.25 x 9.5 in (285.75 x 241.3 mm) | | UI20S, w/ funnel UI20FS | UI20SY, w/ funnel UI20FSY | UI20SB, w/ funnel UI20FSB | UI20SG, w/ funnel UI20FSG |
| 1 gallon (4 L) | | 9 x 8 in (228.6 x 203.2 mm) | | UI10S, w/ funnel UI10FS | UI10SY, w/ funnel UI10FSY | UI10SB, w/ funnel UI10FSB | UI10SG, w/ funnel UI10FSG |
| 2.5 gallon (9.5 L) | | 11.25 x 10 in (285.75 x 254 mm) | | UI25S, w/ funnel UI25FS | UI25SY, w/ funnel UI25FSY | UI25SB, w/ funnel UI25FSB | UI25SG, w/ funnel UI25FSG |



TYPE II SAFETY CANS



| Capacity | Description | Hose Dimension | Outside Dimensions | Approvals / Regulation | Red Models | Yellow Models | Blue Models | Green Models |
|--------------------|--------------------------|---------------------------------|--------------------------------|------------------------------|------------|---------------|-------------|--------------|
| 5 gallon (19 L) | Steel Safety Can w/ Hose | Hose 0.625 x 9 in (16 x 229 mm) | 11.75 x 17.5 in (298 x 445 mm) | FM, OSHA, NFPA, UL, ULC, TUV | 7250120 | 7250220 | 7250320 | 7250420 |
| 2 gallon (7.5 L) | | | 9.5 x 13.25 in (241 x 337 mm) | | 7220120 | 7220220 | 7220320 | 7220420 |
| 1 gallon (4 L) | | | 9.5 x 10.5 in (241 x 267 mm) | | 7210120 | 7210220 | 7210320 | 7210420 |
| 2.5 gallon (9.5 L) | | | 11.75 x 12 in (298 x 305 mm) | | 7225120 | 7225220 | 7225320 | 7225420 |
| 2.5 gallon (9.5 L) | | Hose 1 x 9 in (25 x 229 mm) | 11.75 x 12 in (298 x 305 mm) | | 7225130 | 7225230 | 7225330 | 7225430 |
| 5 gallon (19 L) | | | 11.75 x 17.5 in (298 x 445 mm) | | 7250130 | 7250230 | 7250330 | 7250430 |



TYPE II SAFETY CANS



| Capacity | Description | Hose Dimension | Outside Dimensions | Approvals / Regulation | Red Models | Yellow Models | Blue Models | Green Models |
|--------------------|--------------------------|---------------------------------|---------------------------------------|------------------------------|------------|---------------|-------------|--------------|
| 5 gallon (19 L) | Steel Safety Can w/ Hose | Hose 0.625 x 9 in (16 x 229 mm) | 12.5 x 15.875 in (317.5 x 403.225 mm) | FM, OSHA, NFPA, UL, ULC, TUV | U251S | U251SY | U251SB | U251SG |
| 1 gallon (4 L) | | | 11.25 x 7.25 in (285.75 x 184.15 mm) | | U211S | U211SY | U211SB | U211SG |
| 2.5 gallon (9.5 L) | | | 11.25 x 9.5 in (285.75 x 241 mm) | | U226S | U226SY | U226SB | U226SG |
| 2.5 gallon (9.5 L) | | Hose .875 x 9 in (22 x 229 mm) | 11.25 x 9.5 in (285.75 x 241 mm) | | U251SX5 | U251SX5Y | U251SX5B | U251SX5G |
| 5 gallon (19 L) | | | 12.5 x 15.875 in (317.5 x 403.225 mm) | | U226SX5 | U226SX5Y | U226SX5B | U226SX5G |



POLY SAFETY CANS



| Capacity | Description | Outside Dimensions | Approvals / Regulation | Red Models | White Models |
|--------------------|---|--|------------------------|------------|--------------|
| 1 gallon (4 L) | Polyethylene Oval Self Closing Safety Can w/ Stainless Steel Hardware | 4.625 x 7.625 x 12.75 in (117 x 194 x 324 mm 1.45 in 37 mm) | — | — | 12161 |
| 5 gallon (19 L) | Polyethylene Wide Mouth Self Closing Safety Can w/ Stainless Steel Hardware | 12 x 20 in (305 x 508 mm 3.625 in 92 mm) | | — | 12765 |
| 2.5 gallon (9.5 L) | Polyethylene Self Closing Safety Can w/ Stainless Steel Hardware | 10.75 x 15.25 in (273 x 387 mm 1.45 in 37 mm) | | — | 12260 |

Liquid Disposal Wide Mouth Safety Cans

| | | | | | |
|------------------|--|--|--------|-------|-------|
| 2 gallon (7.5 L) | Polyethylene Safety Can w/ Stainless Steel Hardware w/ 08530 Fill Gauge Built-In | 12 x 14.75 in (305 x 375 mm) | FM | 14765 | 12754 |
| 2 gallon (7.5 L) | Polyethylene Safety Can w/ Stainless Steel Hardware | | | 14762 | 12751 |
| 5 gallon (19 L) | Polyethylene Safety Can w/ Stainless Steel Hardware w/ 08530 Fill Gauge Built-In | 12 x 20 in (305 x 508 mm) | — | 14565 | — |
| 1 gallon (4 L) | Polyethylene Oval Safety Can | 4.625 x 7.625 x 12.75 in (117 x 194 x 324 mm) | FM | 14160 | 12162 |
| 5 gallon (19 L) | Polyethylene Safety Shelf Can w/ Self-Close Bottom Faucet 08540 | 11.5 x 17 in (292 x 432 mm) | — | 14545 | — |
| 5 gallon (19 L) | Round Polyethylene Safety Can | 12.75 x 16 in (324 x 406 mm) | FM, UL | 14561 | — |



DOT SAFETY CANS



| Capacity | Description | Hose Dimension | Outside Dimensions | Approvals / Regulation | Red Models | Yellow Models |
|-------------------|------------------------------|------------------------------------|-----------------------------------|------------------------|------------|---------------|
| 2.5 gallon (9.5L) | DOT Steel Type II Safety Can | Hose 1 x 9 in (25 x 229 mm) | 11.75 x 13 in (298 x 330 mm) | FM, UN/DOT, OSHA, NFPA | 7325130 | 7325230 |
| 5 gallon (19 L) | | | 11.75 x 18.5 in (298 x 470 mm) | | 7350130 | 7350230 |
| 2.5 gallon (9.5L) | | Hose 0.625 x 9 in (16 x 229 mm) | 11.75 x 13 in (298 x 330 mm) | | 7325120 | 7325220 |
| 5 gallon (19 L) | | | 11.75 x 18.5 in (298 x 470 mm) | | 7350110 | 7350210 |

DOT SAFETY CANS



| Capacity | Description | Hose Dimension | Outside Dimensions | Approvals / Regulation | Red Models | Yellow Models |
|-----------------|------------------------------|---------------------------------|-------------------------------------|------------------------|------------|---------------|
| 5 gallon (19 L) | DOT Steel Type II Safety Can | Hose 0.625 x 9 in (16 x 229 mm) | 12.5 x 15.75 in (317.5 x 400 mm) | FM, UN/DOT, OSHA, NFPA | 1215SX5 | 1215SX5Y |
| 5 gallon (19 L) | | Hose .875 x 9 in (22 x 229 mm) | 12.5 x 15.75 in (317.5 x 400 mm) | | 1215 | 1215Y |




Try these related products

- 1. Absorbent Pads
PetroPad™
83982
- 2. 2 Quart Galvanized
Steel Plunger
Dispensing Can
P702
- 3. 6 Gallon Plastic
Oily Waste Can
933FL
- 4. 90 Gallon, 2 Shelves,
2 Doors, Self Close,
Flammable Cabinet
899020



Safety Cans

(800) 798-9250 • Justrite.com • Eagle.justrite.com



As a leader in safety, the Justrite Safety Group includes these family of safety brands:

